

Classic L8



On Line Booth for manual coating


The manual coating booth Classic L-8 is designed for double-sided manual coating with a conveyor system. This booth can be used for a basic automatic application as well.

The advantages of the Classic L-8 at a glance :

- Powder coated steel booth
- Stainless steel booth floor
- Integrated Illumination
- 2 Exhaust air units
- 2 Electrical/ Pneumatic control units
- 2 mobile 80 l powder collecting hoppers
- Service doors for simplified filter cartridge changing
- Supervision of minimal exhaust air volume

Your global partner for high quality powder coating



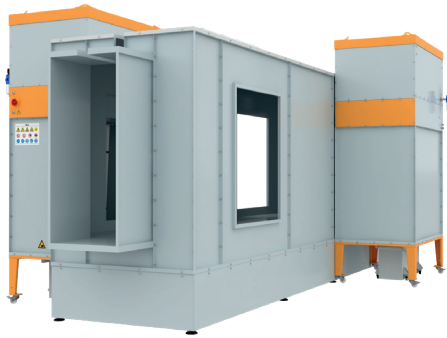

Technical Specification

Standard Version

Exhaust air volume: nominal: 2 x 6600 m³/h
 working range: 2 x 5500 - 6300 m³/h

Filter: 2 x 4 Filter cartridges
 Filter surface: 2 x 60 m²
 Filter Cleaning system: Jet with Venturi

Electrical Power: 2 x 4,0 kW, 3 x 380 - 420 V, 50 Hz

Air consumption: - with powder collecting hoppers: 2 x 15 Nm³/h max.
 - with fluidized powder hoppers: 2 x 50 Nm³/h max.

Option: 40 l powder hopper, fluidized
 incl. vibrating sieve

Dimensions :

A: min. 200
 B: 1400 / 1800 mm
 H2: min. 100 mm
 H3: min. 300 mm
 L1: 600, if H1 ≤ 1400 mm
 1300, if H1 > 1400 mm

other dimensions on request


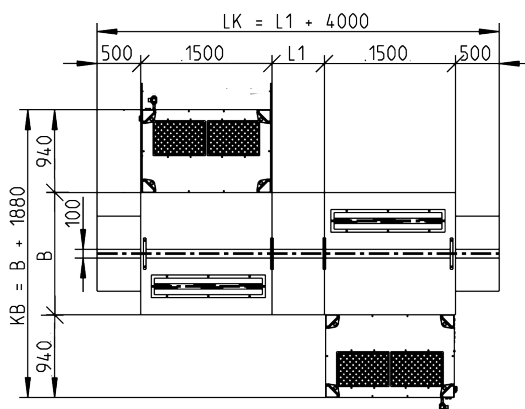


Abbildung symbolisch!

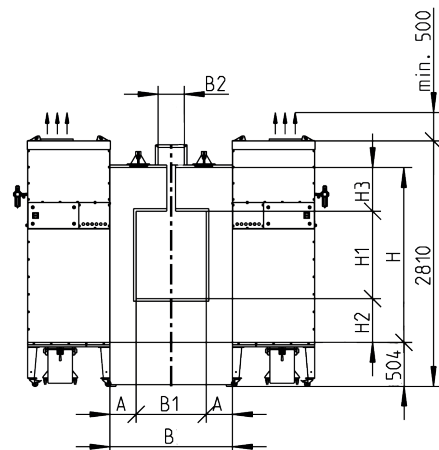

Gema Switzerland reserves the right to make technical changes without notice!