

Operating instructions and spare parts list

OptiCenter Powder injector OptiFlow (type IG06-P)

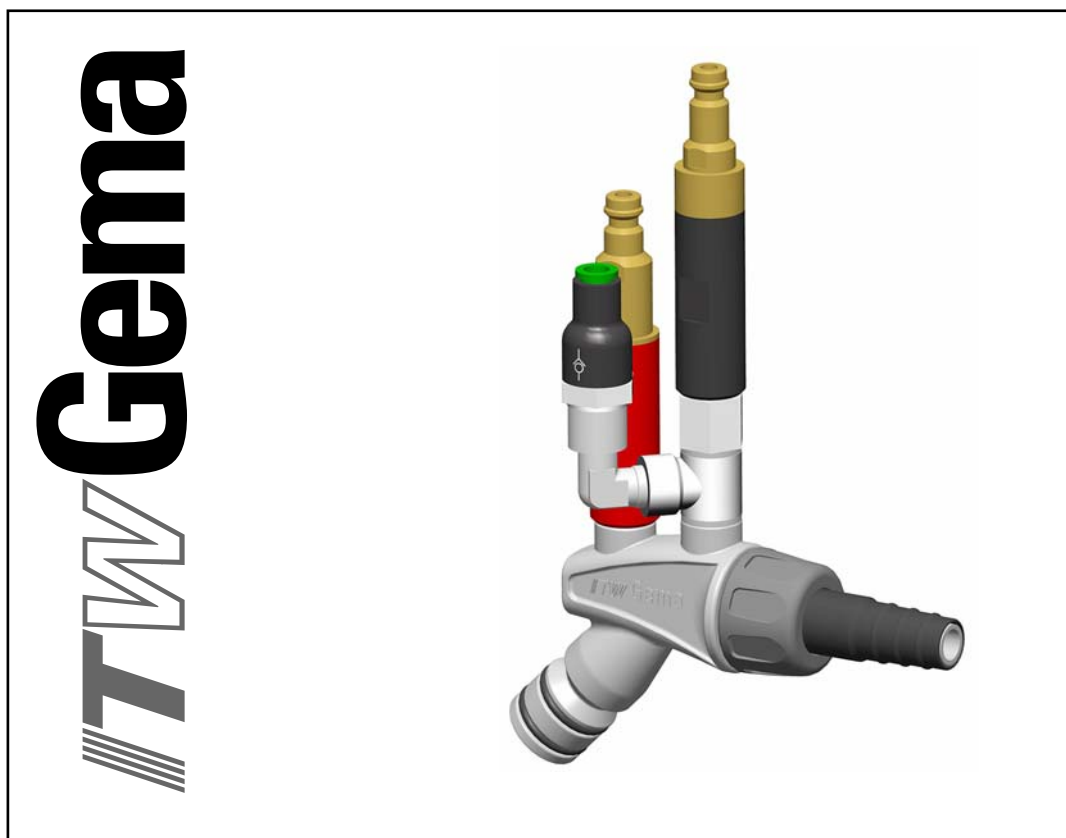

Translation of the original operating instructions

Documentation OptiFlow (type IG06-P)

© Copyright 2008 ITW Gema GmbH

All rights reserved.

This publication is protected by copyright. Unauthorized copying is prohibited by law. No part of this publication may be reproduced, photocopied, translated, stored on a retrieval system or transmitted in any form or by any means for any purpose, neither as a whole nor partially, without the express written consent of ITW Gema GmbH.

OptiStar, OptiTronic, OptiGun, OptiSelect, EasyTronic, EasySelect, EasyFlow and SuperCorona are registered trademarks of ITW Gema GmbH.

OptiFlex, OptiMatic, OptiMove, OptiMaster, OptiPlus, MultiTronic and Gematic are trademarks of ITW Gema GmbH.

All other product names are trademarks or registered trademarks of their respective holders.

Reference is made in this manual to different trademarks or registered trademarks. Such references do not mean that the manufacturers concerned approve of or are bound in any form by this manual. We have endeavored to retain the preferred spelling of the trademarks, and registered trademarks of the copyright holders.

To the best of our knowledge and belief, the information contained in this publication was correct and valid on the date of issue. ITW Gema GmbH makes no representations or warranties with respect to the contents or use of this publication, and reserves the right to revise this publication and make changes to its content without prior notice.

Printed in Switzerland

ITW Gema GmbH
Mövenstrasse 17
9015 St. Gallen
Switzerland

Phone: +41-71-313 83 00

Fax.: +41-71-313 83 83

E-Mail: info@itwgema.ch

Homepage: www.itwgema.ch

Table of contents


OptiFlow - plug-in injector for organic powder	3
Field of application	3
Principle of the injector and influence of supplementary air	4
Powder volume setting table for OptiFlow Injector	5
General conditions for the OptiFlow Injector.....	5
Guide values for OptiStar with OptiFlow Injector	5
Cleaning and maintenance	7
Cleaning the injector	7
Cleaning the check valve units	8
Troubleshooting guide	9
Problem fixing	9
Spare parts list	11
Ordering spare parts	11
OptiFlow Powder injector (type IG06-P)	12

OptiFlow - plug-in injector for organic powder

Field of application

The OptiFlow injector is used for conveying normal organic powders between the powder management center and the powder gun. The injector is supplied with a PTFE insert sleeve as standard.

The OptiFlow Injector is a plug-in type and permits easy handling and quick cleaning. All connections are plug-in types and not interchangeable. The injector can be disassembled without special tools. The injector is equipped with an additional connection for the powder hose rinsing.

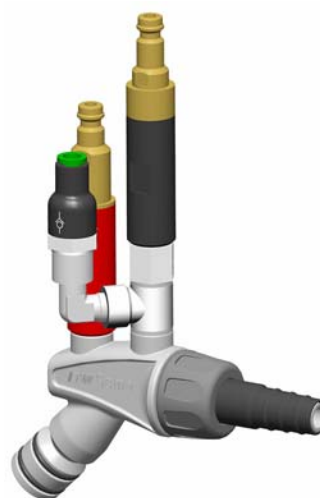

OptiFlow Powder injector (IG06-P type) with coded quick release connections




Note:

The injector is certified for using in the following zone, if powder hoses with conductive strips are used, and the earthing resistance is less than 1 MOhm!

Explosion protection	Zone
CE Ex II 3 D	22

Principle of the injector and influence of supplementary air

When air flows through a nozzle into a cavity with an attached outlet in the continuation of the airflow, a vacuum will be created in the cavity (see figure below). This effect is used now for aspirating powder through a suction opening - a powder/air mixture will be created.

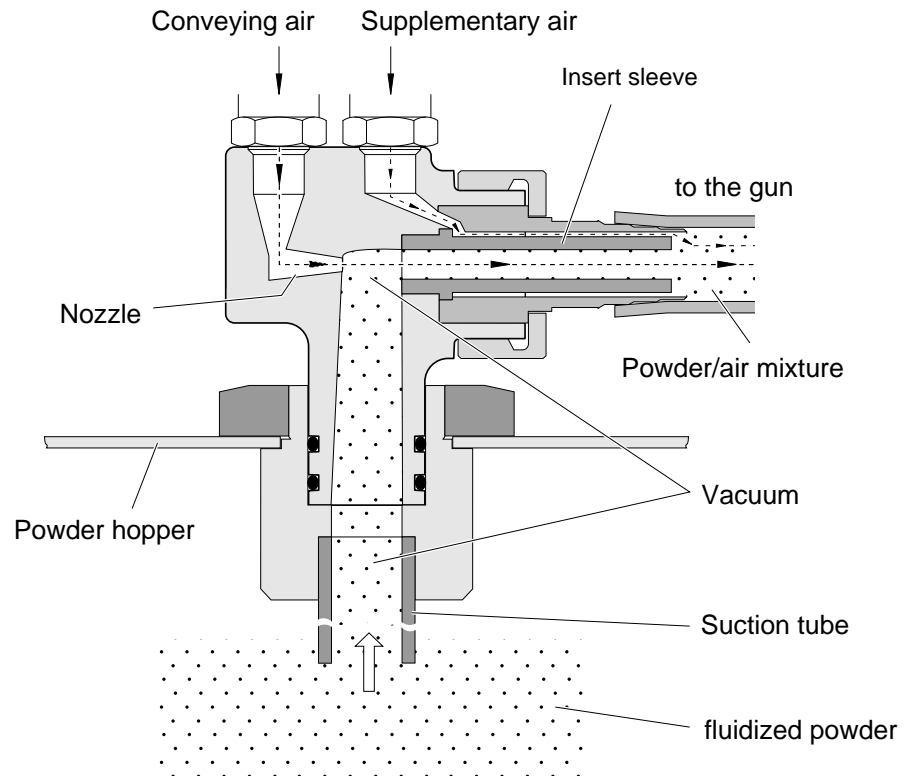

This powder/air mixture is fed through to the powder hose to the gun. The concentration of the powder/air mixture and therefore the powder output amount, depends on the conveying and supplementary air volume, the powder quality, the powder hose length, the powder hose diameter, the number of coils in the hose, the height difference between the powder gun and the injector and the nozzle type. Place great importance on the insert sleeve condition, because wear causes the powder output to reduce drastically.

Experience with pneumatic material handling technology shows that pneumatic transport of fine solid matter (powder) in the form of tubing (hose), the transporting medium requires a certain volume of air per unit of time. If a hose diameter of 11 mm is used, the value is approx. 4 m³/h. In order to reduce the powder output, the vacuum in the cavity of the injector must be lowered by reducing the conveying air pressure. By reducing the conveying air pressure, the air volume in the powder hose sinks to below the optimum value of 4 m³/h, the powder transport becomes irregular and the so-called "pumping" takes place. To prevent this from happening, the supplementary air is added, until the total air volume in the powder hose amounts again to 4-5 m³/h. This takes place fully automatically by the OptiStar Control unit.

Powder volume setting table for OptiFlow Injector



In order to set the ideal powder volume on the OptiStar, it is recommended to select first the powder cloud firmness, respectively the total air. As guide values for different powder hoses, the following can be assumed:

- Powder hose 74 type, Ø 10 mm, **3-5 m³/h**
- Powder hose 66 type, Ø 11 mm, **4-5 m³/h**

According to the prevailing conditions (powder, powder hose layout, the parts to be coated) a low to lowest total air can also be set with the standard hose 74 type, Ø 10 mm.

If a very large powder output is required, it is recommended to select a larger powder hose internal diameter (Ø 12 mm).



Note:


It should be noted, that if irregular or pumping conveying occurs, as a rule, the total air is set too low!

General conditions for the OptiFlow Injector

Powder type	Epoxy/polyester
Powder hose length (m)	10
Powder hose Ø (mm)	11
Input pressure (bar)	5,0
Conveying air nozzle (mm)	1,6
Supplementary air nozzle Ø (mm)	1,4

Guide values for OptiStar with OptiFlow Injector

All values in these tables are guide values. Differing environmental conditions, wear and different powder types can affect the table values.



Total air		3 Nm ³ /h	4 Nm ³ /h	5 Nm ³ /h
		Powder output (g/min)		
Powder output (%)	10	25	30	35
	20	50	60	75
	30	70	85	100
	40	90	110	130
	50	100	130	160
	60	130	150	180
	70	150	175	200
	80	165	200	240
	90	185	215	260
	100	195	235	290

Cleaning and maintenance


Cleaning the injector

1. Remove the injector
2. Remove the powder hose from hose connection (4)
3. Clean the hose connection (4) with compressed air which is free of oil and water, and check for wear
4. Clean the injector body (1) with compressed air which is free of oil and water. Possible contaminations are visible through the opening of the powder hopper connection (2)
5. Reinsert the injector and fix it



WARNING!

If the injector is severely contaminated, it must be dismantled. Remove the check valve units (6 and 7) with the correct sized spanner. Clean the component parts with compressed air and, if necessary, dissolve sintered deposits with nitro-thinner. Do not use acetone, do not scrape!

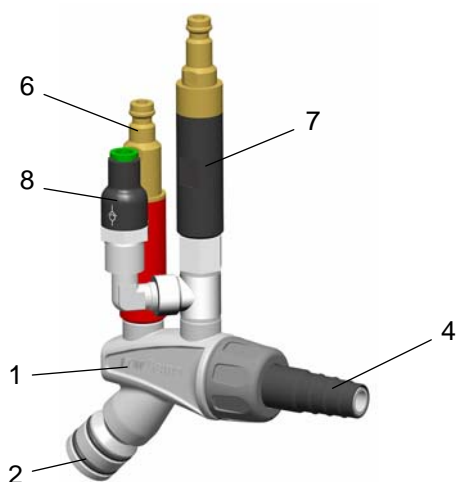


- | | | | |
|---|--------------------------|---|--------------------------------------|
| 1 | Injector housing | 6 | Check valve unit (conveying air) |
| 2 | Powder hopper connection | 7 | Check valve unit (supplementary air) |
| 4 | Powder hose connection | 8 | Powder hose rinsing connection |

Cleaning the check valve units

**Note:**

**Take care when dismantling the check valve units!
Blow off the filter elements from the inside to the outside!**

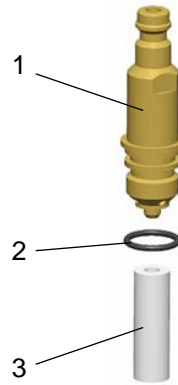

- 1 Connection/plug
- 2 O-ring
- 3 Filter element

**Note:**

Do not immerse the filter elements in fluidities or solvents!!!

Troubleshooting guide

Problem fixing

If the powder gun does not spray powder although the control unit is switched on, then the injector can be dirty or clogged.

Error/cause	Troubleshooting
Injector nozzle, check valve unit, powder hose or powder gun are clogged	Clean the corresponding parts and if necessary, replace them
Conveying vacuum too low	Increase the powder quantity and/or total air volume on the control unit
Insert sleeve worn, not or incorrect inserted	Replace or insert it, observe the indexing cam
Insert sleeve is worn after a short operating duration	Clean the nozzle, if damaged, replace it

Spare parts list

Ordering spare parts

When ordering spare parts for powder coating equipment, please indicate the following specifications:

- Type and serial number of your powder coating equipment
- Order number, quantity and description of *each* spare part

Example:

- **Type** OptiFlow (type IG06-P)
Serial number 1234 5678
- **Order no.** 203 386, 1 piece, Clamp - Ø 18/15 mm

When ordering cable or hose material, the required length must also be given. The spare part numbers of this yard/meter ware is always marked with an *.

The wearing parts are always marked with a #.

All dimensions of plastic hoses are specified with the external and internal diameter:

Example:

Ø 8/6 mm, 8 mm outside diameter (o/d) / 6 mm inside diameter (i/d)



WARNING!

Only original ITW Gema spare parts should be used, because the explosion protection will also be preserved that way. The use of spare parts from other manufacturers will invalidate the ITW Gema guarantee conditions!


OptiFlow Powder injector (type IG06-P)

OptiFlow IG06-P Powder injector - complete (pos. 1-18)		1007 779
A	Conveying air check valve unit (red marking) - complete (incl. pos. 6, 8, 9 and 12)	1005 589
B	Supplementary air check valve unit (black marking) - complete (incl. pos. 7, 8, 9 and 13)	1005 590
C	Injector body - complete (incl. pos. 1, 2, 10 and 11)	1006 530
1	Injector body (without pos. 2)	1006 484
2	O-ring - Ø 16x2 mm	1007 794#
3	Insert sleeve - Teflon, complete	1006 485#
4	Hose connection - Ø 10-12 mm, complete (incl. pos 4.1)	1006 531
4.1	O-ring - Ø 16x1.5 mm	205 141#
5	Threaded sleeve	1006 483
6	Connector (conveying air) - NW 5.5	1004 366
7	Connector (supplementary air) - NW 5.5	1004 367
8	O-ring - Ø 11x1.5 mm	1000 532#
9	Filter element - Ø 9/4x27 mm	1003 698
10	Nozzle	1006 488
11	Nozzle fixation - complete (incl. pos. 11.1)	1007 792
11.1	O-ring - Ø 8x1 mm	1007 793#
12	Body (red)	1004 369
13	Body (black)	1004 370
14	Check valve - 1/8"a-Ø 6 mm	1000 985
15	Elbow joint - 1/8"a-1/8"i	237 604
16	Hollow screw - 1/8"a-1/8"i, single	251 283
17	Sealing ring - Ø 10.2/13.8x1.5 mm	251 275
18	Swivel ring - Ø 1/8"i-1/8, single	241 903
19	Conveying air hose - Ø 8/6 mm (red)	103 500*
20	Supplementary air hose - Ø 8/6 mm (black)	103 756*
21	Quick release coupling for conveying air hose - NW5-Ø 8 mm	261 645
22	Quick release coupling for supplementary air hose - NW5-Ø 8 mm	261 637
	Powder hose - 66 type, POE, Ø 16/11 mm, with conductive strip (standard)	105 139*#
	Powder hose - 74 type, POE, Ø 15/10 mm, with conductive strip	1001 673*#
	Powder hose - 75 type, POE, Ø 18/12 mm, with conductive strip	1001 674*#

* Please indicate length

Wearing part

OptiFlow Powder injector (type IG06-P)

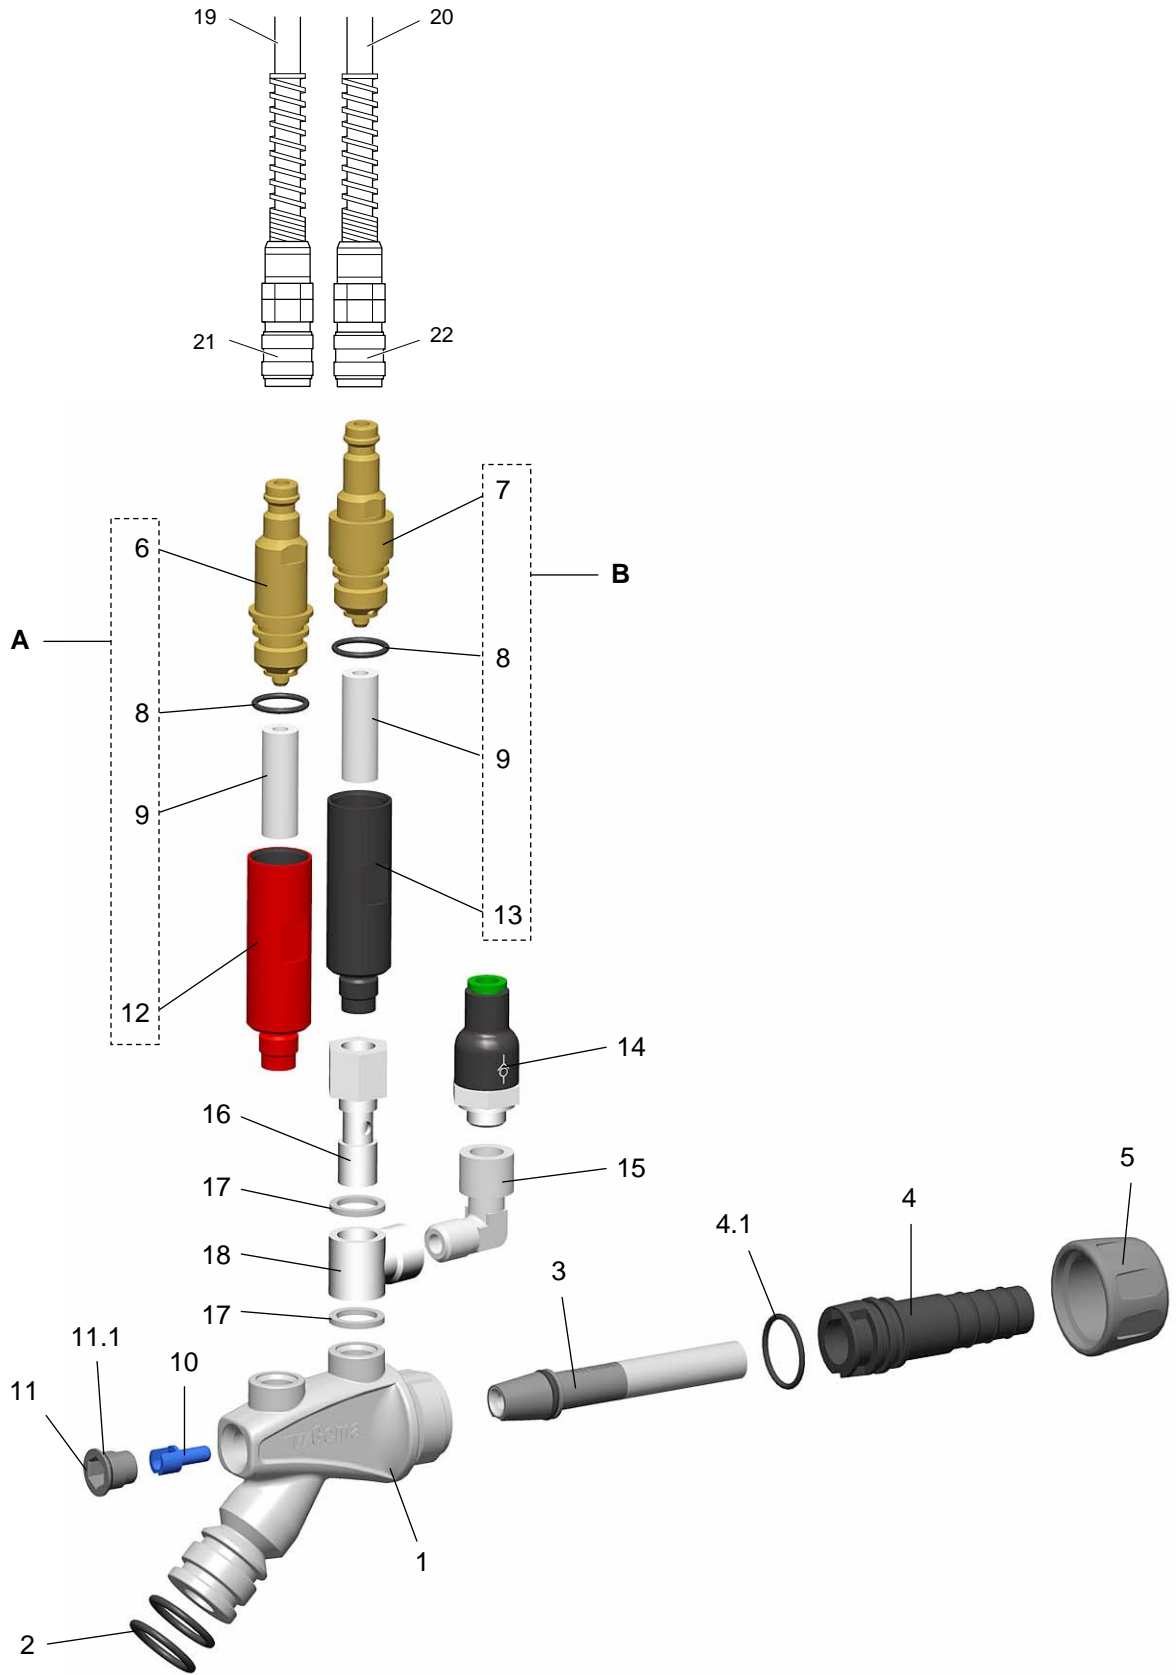

OptiFlow Powder injector (type IG06-P)