
Devilbiss

EXL HVLP Siphon Feed Spray Gun



EXI HVLP Siphon Feed Spray Gun



- Precision engineered #2000 air cap— Meets exacting performance demands, producing an extremely fine finish with all materials. Developed in conjunction with top American and European paint companies to spray the latest materials
- Large spray pattern for fast coverage
- Even distribution of materials for no mottling or striping Excellent color matching capabilities
- Optimum atomization for clearcoats and single stages Produces a high gloss finish and minimizes orange peel.
 Excellent fluid control for applying more film build with fewer passes
- Lightweight and comfortable Classic DeVilbiss fit and feel
- Economical servicing Air cap, fluid tips and needles are fully interchangeable and available separately
- Highly efficient HVLP design Complies with environmental regulation requiring high volume, low pressure. Saves material. Very little overspray
- Low air pressure and volume requirements GTI-5033-2000 Air Cap Test Kit (Order Separately) Provides consistent setup and regulatory proof of air cap pressure
- Stainless steel fluid tip, needle and fluid inlet







Technical Specifications:

Model No.	Fluid Tip (mm)	Air Cap	Applications
EXL-520S-18	1.8	2000	Medium Viscosities 20-25 psi inlet pressure


Specifications:


 $30~\mathrm{psi}$ inlet pressure delivers $10~\mathrm{psi}$ air cap pressure at $16~\mathrm{cfm}$ air volume


Refer to Service Bulletin: SB-2-496

EXL HVLP Siphon Feed Spray Gun









Lid Assembly (Quart)

Siphon Cup Assy. (Quart)

Fluid Inlet, Gasket, Nut Kit

Clip, Seal and Pin (Kit of 5 Each)

Air Cap Cleaning Kit (not shown)

**Tri Seal® Lid Gasket (Kit of 5)

Drip Free Valve and Gasket (Kit of 3)

Non Stick Siphon Cup Assy. (Quart)

JGA-4042

KK-5060

TGC-9-K5

TGC-404

KR-428-2

TLC-40

39


*41

*42

43

GTI-428-K5

TGC-407-1-K3

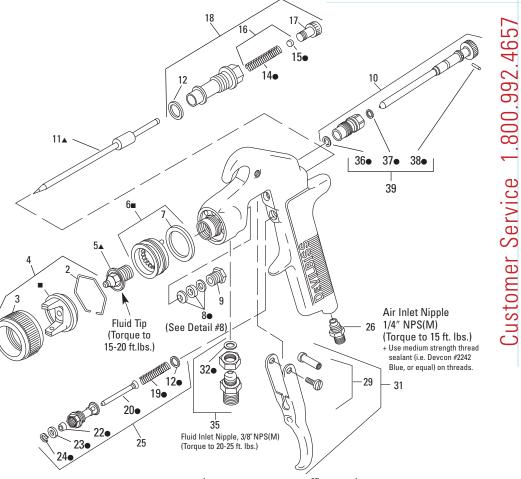

■ Chart 1 Air Cap & Baffle Combinations

No. Stamp	ed on Parts	Set —			CFM®	[®] Cap	Pressi	ıre
Air Cap Part No.	Baffle	Ref. No. 4 Air Cap	Ref. No. 7 Baffle Assy.	2 psi	4 psi	6 psi	8 psi	10 psi
2000	(Not Stamped)	GTI-407-2000	GTI-425	7.3	10.4	12.8	14.7	16

• NOTE: Gun Repair Kit (KK-5058-2) Contains:

Ref. No.	Description	Qty.
6	Baffle Seal	1
8	Packing	1
12	Gasket Kit	2
14	Fluid Needle Spring	1
15	Spring Pad	1
19	Air Valve Spring	1
20	Air Valve	1
22	U Cup Seal	1
23	Washer	1
24	Snap Ring	1
32	Fluid Cup Gasket	1
36	Retaining Clip	1
37	Seal	1
38	Pin	1

▲ Chart 2 Fluid Tips

1				
Fluid Needle Model No.				
GTI-413				
Fluid Tip Model No.	Tip Siz In.	e (I.D.) mm		
GTI-213-12 ◆	.047	1.2		
GTI-213-13 ◆	.051	1.3		
GTI-213-14 ◆	.055	1.4		
GTI-213-15 ◆	.059	1.5		
GTI-213-16 ◆	.063	1.6		
GTI-213-18	.070	1.8		
GTI-213-20 ◆	.079	2.0		
GTI-213-22 ◆	.086	2.2		

DeVilbiss 195 Internationale Blvd. Glendale Heights, IL 60139 630-237-5000 Fax 630-237-5011 www.devilbiss.com



^{• (}KK-5058-2) Gun Repair Kit includes a quantity of necessary parts.

Suffixes: -K5 designates kit of multiple parts. Example: JGA-4035-K5 is a kit of 5 packings.

* Registered Trademark of Tri-Seal International.